



4" Diameter Cam Followers


High Temperature & Super-Heavy Duty Capacity

ZERO Maintenance | Lubricated for Life

*** Any standard and custom sizes available upon request, call (732)-882-0777 or email info@utausa.com for inquires.***

UTA's High Temp Cam Followers are designed to withstand temperatures up to 1,200°F

Key Feature: ZERO Torque & Free Spinning

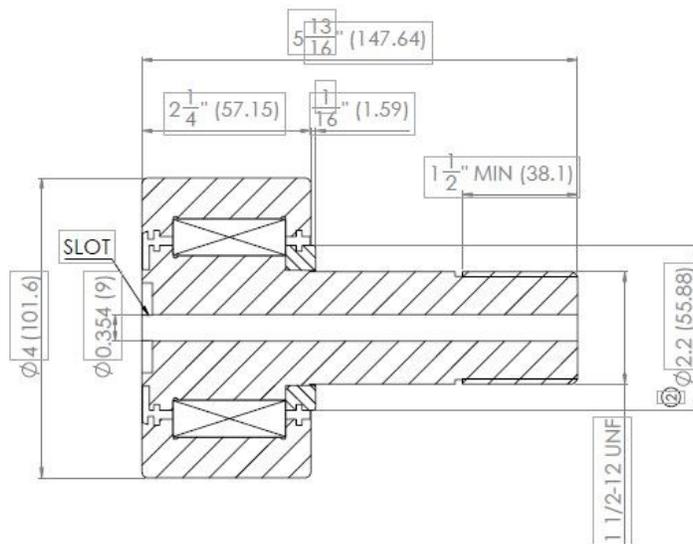

Product #	OD	ID	WIDTH	LOAD CAPACITY (LBS.)
UTA4011B	4in.	N/A	2.25in.	DYNAMIC: 37,400 STATIC: 53,500

Full detailed outline drawing on next page


www.utausa.com

DRG. No:- UT4011B

DO NOT SCALE

IF IN DOUBT ASK

1ST ANGLE PROJECTION



ISS No 1

DATE


MODIFICATION

2

27/06/13

WAS 1 5/8"

DYNAMIC CAPACITY 37400 Lbs
STATIC CAPACITY 53500 Lbs
15 OFF 1/2 x 1 1/12 ROLLERS
STEEL SHIELD

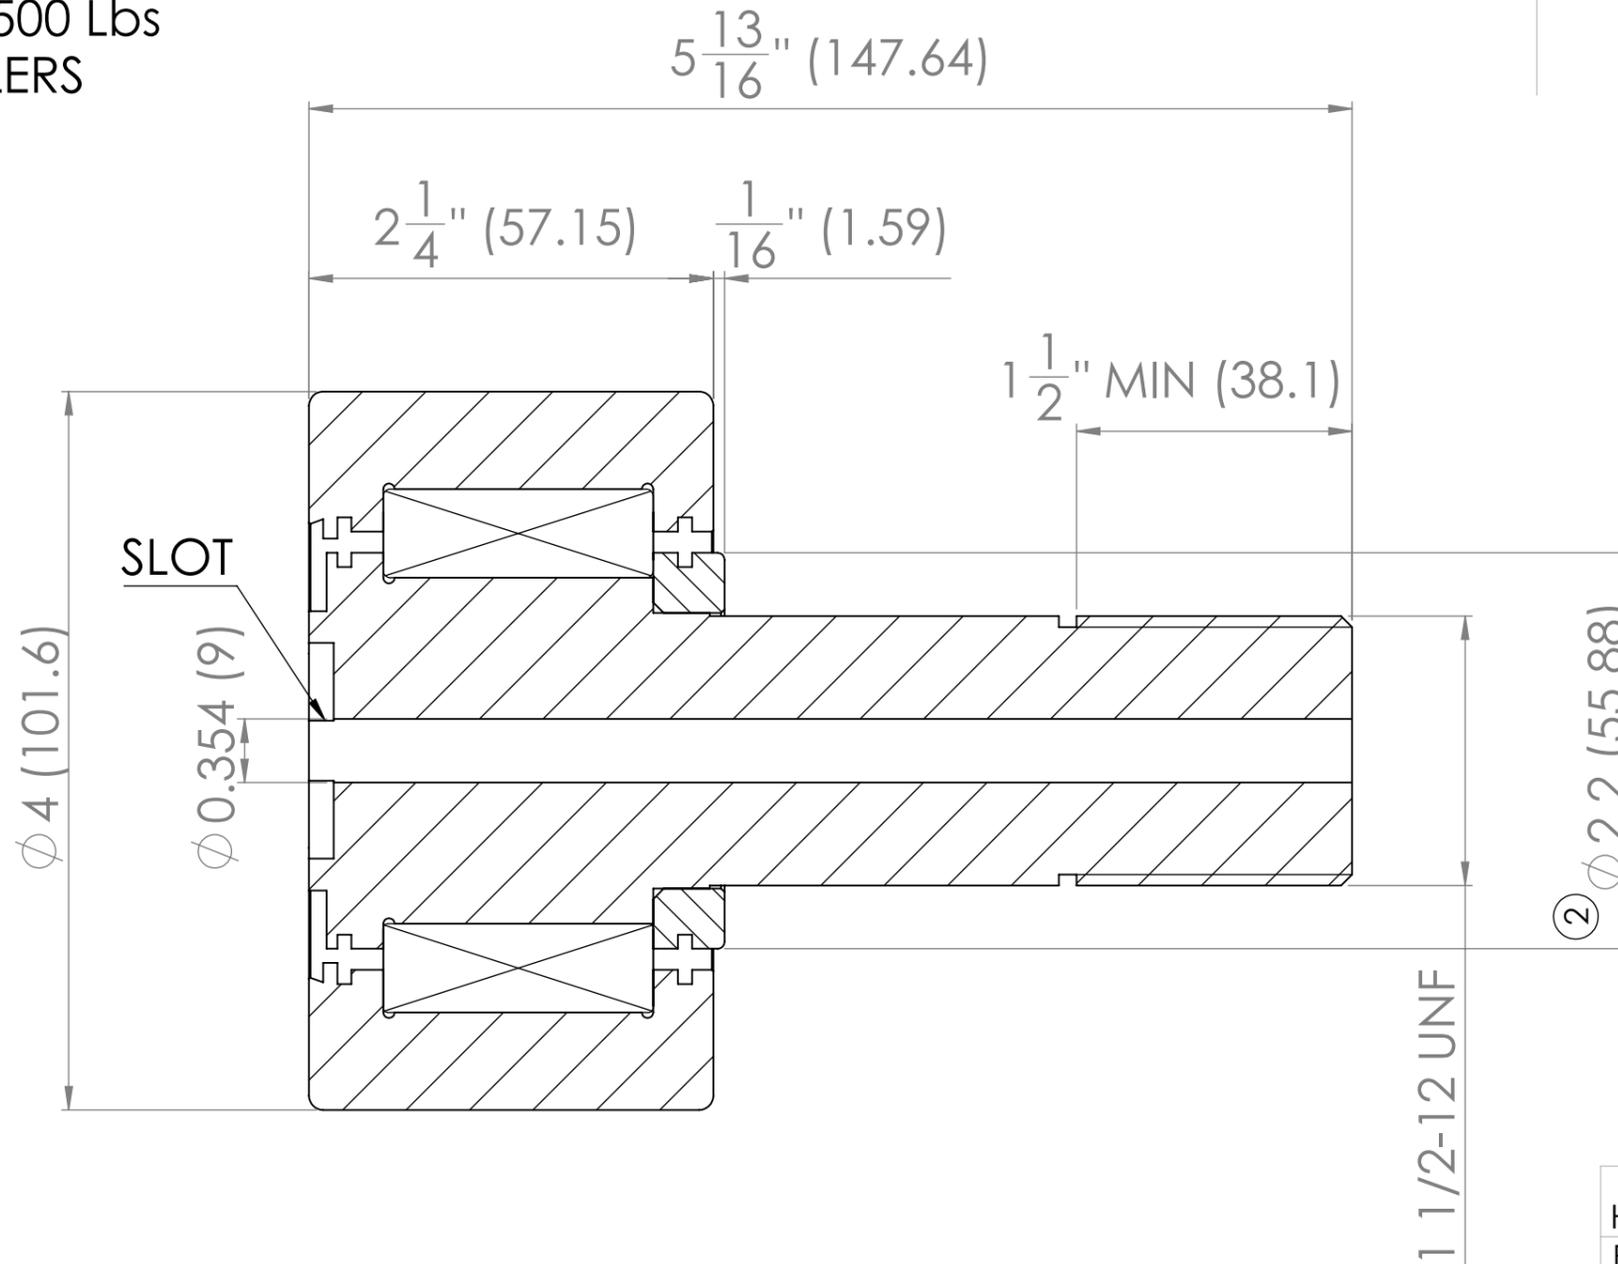

Unique Technologies Associates
42 Mileed Way
Avenel, NJ 07001
Phone: 732-882-0777
www.utausa.com

UNSPECIFIED
CORNER RADII

UNSPECIFIED
FILLET RADII

UNSPECIFIED
CORNER CHAMFER 0.2x45

UNSPECIFIED
FILLET CHAMFER

SCALE
1:1

TITLE

4" DIA CAM FOLLOWER

LUBRICATION
COBRA SOLID LUBRICANT

Lubricated for Life | Maintenance Free

DIMENSIONS ARE IN INCHES

HEAT TREATMENT DETAILS
HARDEN & TEMPER TO 58/62 HRC
FINISH:-

MATERIAL SPECIFICATION

535A99

DRAWN:- GCT DATE:-22/06/13

CHECKED:- DATE:-

CUSTOMER:-

PART No:-

DRG. No:- UT4011B